

SST/SST-FR
Self-sealing,
Self-Sealing, Heat-Shrinkable Tubing

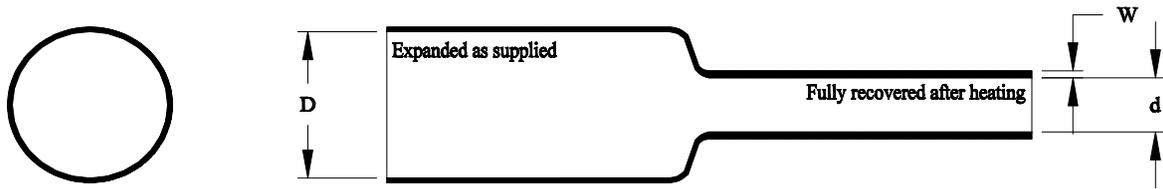


Table 1: Dimensions

SIZE	As Supplied	Recovered	
	Inside Diameter Minimum (D) (*)	Inside Diameter Maximum (d)	Wall Thickness Nominal (W)
-03	0.300 (8)	0.100 (3)	0.070 (1.8)
-04	0.400 (10)	0.150 (4)	0.070 (1.8)
-07M	0.750 (19)	0.220 (6)	0.070 (1.8)
-07	0.750 (19)	0.220 (6)	0.100 (2.5)
-11M	1.100 (28)	0.375 (10)	0.110 (2.8)
-11	1.100 (28)	0.375 (10)	0.120 (3.0)
-13M	1.300 (33)	0.375 (10)	0.110 (2.8)
-13	1.300 (33)	0.375 (10)	0.120 (3.0)
-15M	1.500 (38)	0.500 (13)	0.120 (3.0)
-15	1.500 (38)	0.500 (13)	0.140 (3.6)
-17M	1.700 (43)	0.500 (13)	0.120 (3.0)
-17	1.700 (43)	0.500 (13)	0.140 (3.6)
-20M	2.000 (51)	0.750 (19)	0.120 (3.0)
-20	2.000 (51)	0.750 (19)	0.160 (4.1)
-27	2.700 (69)	0.900 (23)	0.160 (4.1)
-30	3.000 (76)	1.250 (32)	0.160 (4.1)
-35	3.500 (89)	1.250 (32)	0.160 (4.1)
-40	4.000 (102)	1.750 (44)	0.160 (4.1)
-45	4.500 (114)	1.750 (44)	0.160 (4.1)

* When specifications call for coated tubing, reduce allowed minimum inside diameter by 0.10 inch to allow for sealant thickness.

© 2006 Tyco Electronics Corporation. All rights reserved

Specification Control Drawing

	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	Raychem	Title: SST/SST-FR Self-sealing, Heat-shrinkable Tubing		
Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application		Document No : SST/SST-FR			
Cage Code: 06090	Scale: None	Size: A	Rev. Date: 30-Jun-06	Rev.: E	Sheet: 1 of 2

If this document is printed it becomes uncontrolled. Check for the latest revision.


Properties:

SST tubing is fabricated from thermally stabilized, crosslinked, modified polyolefin. It is not flame retarded. It shall be black, red or clear, unless otherwise specified. The standard color is black. SST tubing meets the material requirements of RW 2011. Tests are performed on uncoated tubing.

SST-FR tubing is fabricated from thermally stabilized, flame retarded, crosslinked, modified polyolefin. It shall be black, red or white, unless otherwise specified. The standard color is black. SST-FR tubing meets the material requirements of RW 2011. Tests are performed on uncoated tubing.

ORDERING INFORMATION

SST - 48 - 07 M / FR / 97 / RED / NM

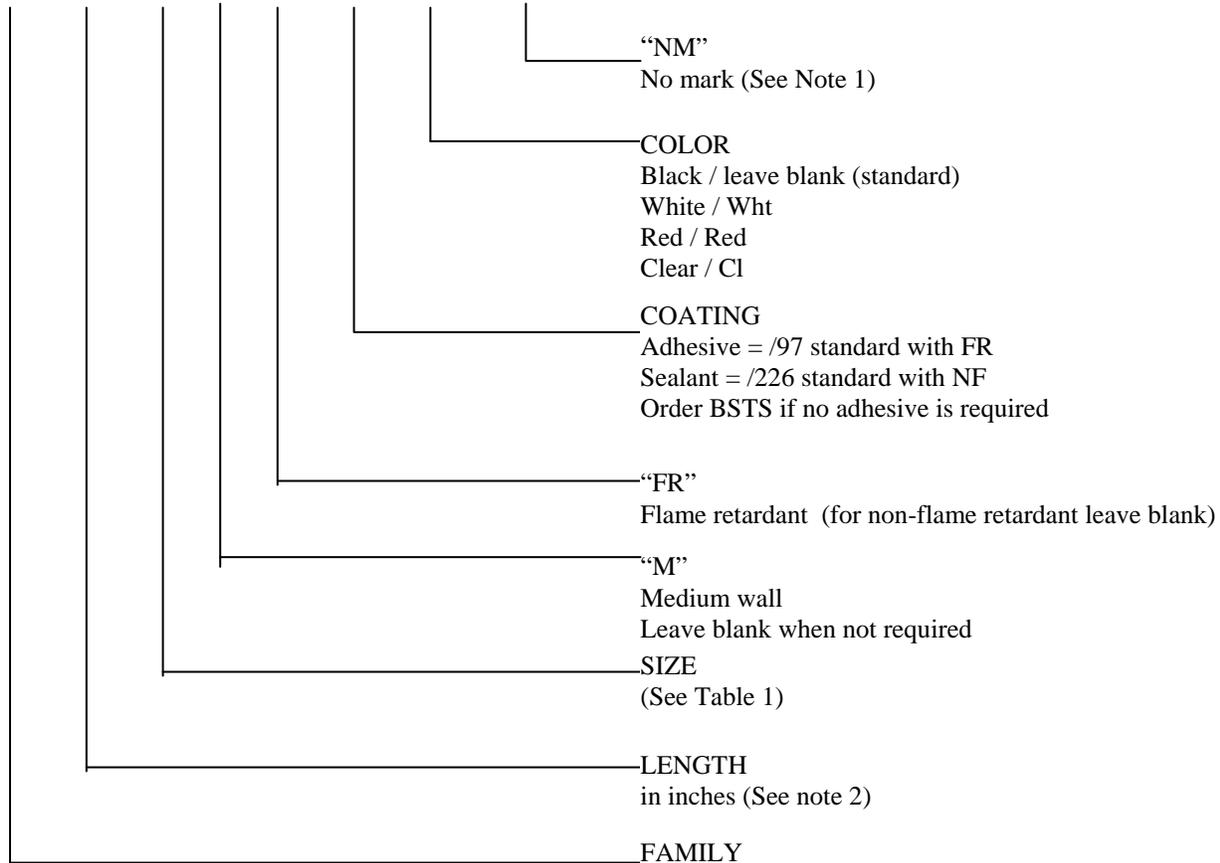

Notes :

1. Standard marking is white for black and red tubing. Standard marking is black for white and clear tubing. Expanded and recovered dimensions will be printed in inches and millimeters. FR will be printed on flame retardant material.
2. 48 inches and less: only sizes 07-45
30 inches and less: for sizes 03-04

Rev. Date: 30-Jun-06	Rev.: E	Document No. SST/SST-FR	Sheet: 2 of 2
-------------------------	------------	-----------------------------------	------------------